LEXRON

-POWER INVERTER WITH CHARGER

Pure Sine Wave Inverter With Charger

2000W

Producst Introduction

FEATURES:

※ Ultra-Fast Transfer Relay: Reduce transfer time between by pass mode and inverter mode, Reduce possibility of voltage drop.

※ Universal Protection Circuit : Overload, Long life for battery, Earth Fault, Short Circuit, Over-temperature,

※ Soft-startTurbo Cooling : Keep the inverter surface cool and higher efficiency, Decide your own AC backup time by choosing different batteries!

Protection

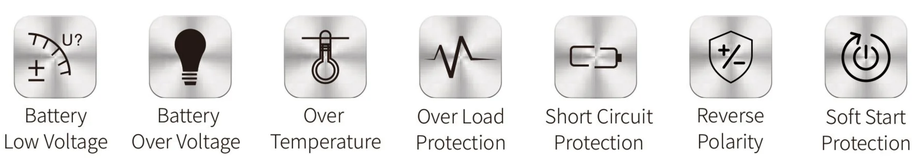

LEXRON

Technical Parameter

Model	CPS2000
Rated Power	2000W
Surge Power	4000W(<1s)
Input Voltage	12VDC
Output Voltage	220VAC±5%
USB Port	5V 2.4A
Frequency	50Hz±3
Output Wave form	Pure Sine Wave
Soft Start	YES
Priority	Grid first
Transfer time	≤8ms
Cooling Way	Intelligent Cooling Fan
Protection	Battery Low Voltage & Over Voltage, Over Load, Over Temperature, Short Circuit, Over current
Working Temperature	-10°C - +50°C
Net Dimension	43*17*10.2cm (L×W×H)
Inner Box Dimension	51.2*22.5*16.6cm (L×W×H)
Meas./Ctn	53*47*36.5/4PCS
N.W./Unit	5.25kg
G.W./Ctn	24.2kgs
Packing	Carton
Warranty	1 Year

Connection Diagram